




Ninja Kitchen System Pulse Motor Replacement

You will learn how to remove the motor from the base to check for frayed wires and/or loose screws.

Written By: DJ

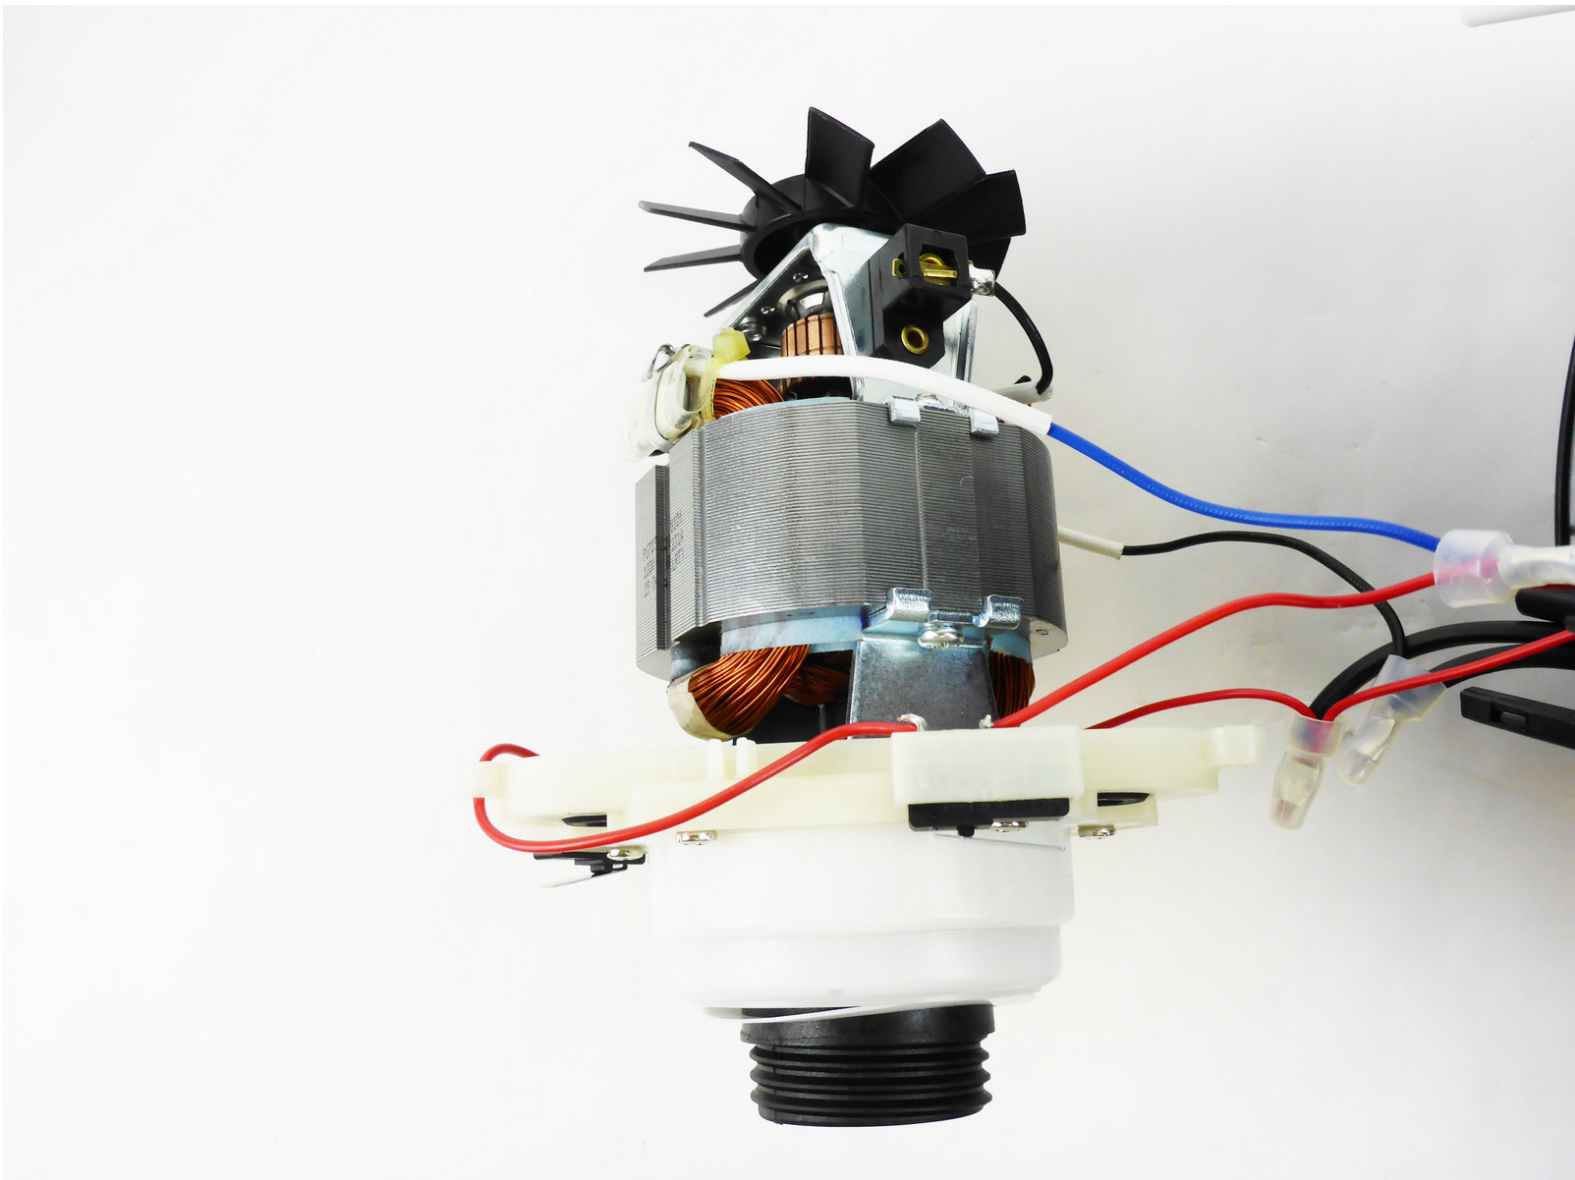

INTRODUCTION

You will learn how to remove the motor from the base to check for frayed wires and/or loose screws.

TOOLS:


- [T10 Torx Screwdriver](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Base Disassembly




- Take out the three 15 mm Phillips #1 screws.
- Remove the 15mm T10 screw.
- ☑ Place the 4 screws on the magnetic mat.

Step 2

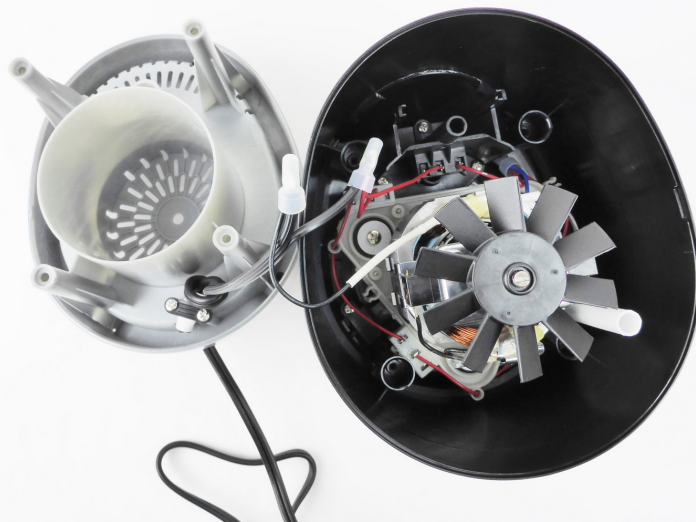

- Remove the gray base by lifting upwards and placing to the side.


Step 3 — Motor

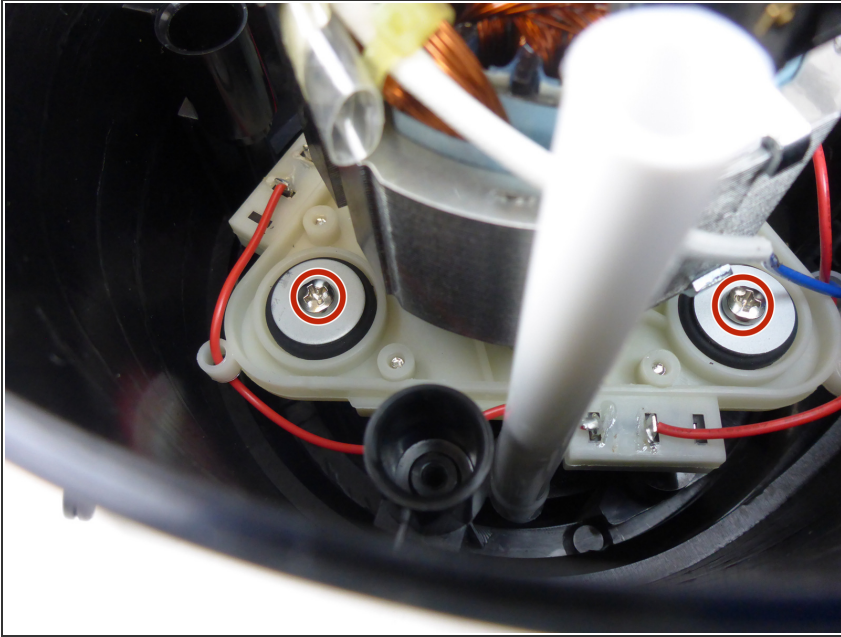

- Remove the three 15 mm Phillips #1 screws.

ⓘ Place screws on magnetic mat.

Step 4

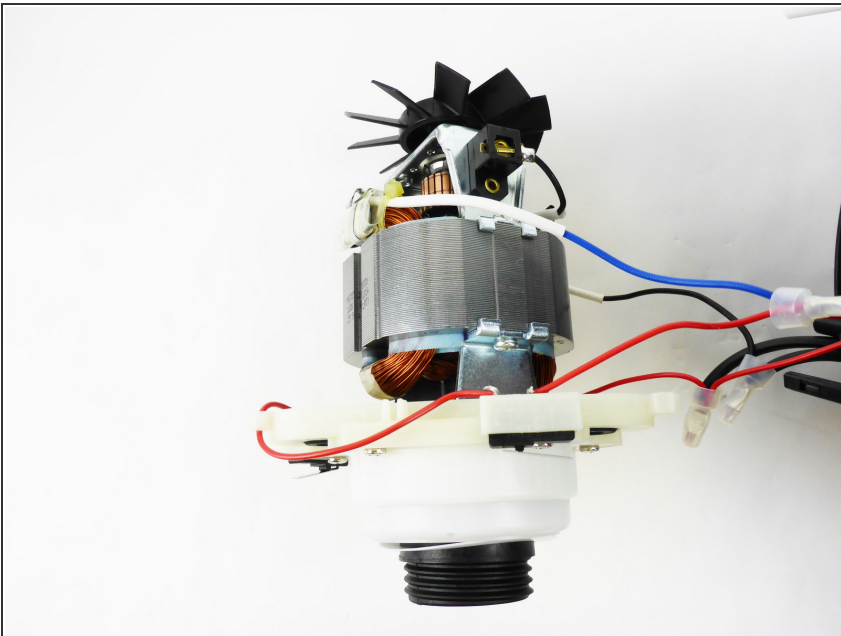

- Remove the motor by gently lifting up. Be careful with the cords, as they may be tangled.
- This is the entire motor for the Ninja. If you have access to a spare motor, simply swap out the motors.

To reassemble your device, follow these instructions in reverse order.